




UPS RACK TOWER 10KVA - 60KVA

Features


- High frequency on-line double conversion technology.
- Advanced dual-core DSP control technology and 3-level technology.
- Active power factor correction (APFC), input power factor up to 0.99
- System efficiency is improved to 96%, energy saving rate is doubled.
- Output power factor 1.0
- Dual-input design, supporting independent bypass.
- Advanced digital and parallel technology, providing higher reliability than single system.
- Wide input voltage range.
- 50 / 60 Hz auto sensing frequency.
- 50 / 60 Hz frequency conversion mode.
- Work efficiency up to 98% in ECO mode.
- Fan speed varies intelligently with load, reducing noise and extending its service life.
- Conformal coating technology to make UPS operate in harsh environment for a long time.
- Flexible battery configuration setting, selectable battery numbers: 32 - 40 pcs.
- Digitally controlled charger (Max. 20 A)
- Ability to switch on the UPS by battery in the absence of mains power (cold start)
- Zero switching time for UPS power supply mode when the mains power is unstable, ensuring the output is uninterrupted.
- Compact internal layout, small footprint
- 5 inches LCD colorful touch screen, friendly human & machine interface
- Powerful background software for parameters configuration and online upgrade.
- Advanced multi-platform communications for UPS monitoring: RS232, USB, RS485, dry contacts, SNMP card, Wi-Fi card and GPRS card.
- Linear derating in low voltage input, reducing battery discharging times, extending the service life of battery.
- Intelligent battery management, automatic equalized and float charging control, charger dormancy control, improving the reliability of charger and extending the battery life.
- Effective hardware and software protection, robust self-diagnosis function, abundant event logs for future check.
- Standard RS232, USB, RS485, EPO, Dry contacts, parallel port.
- Optional SNMP card, Wi-Fi card, GPRS card, SMS alarms.

Rear Panel


1. The touch screen LCD
2. LED
3. Battery start button
4. SNMP card (optional)
5. Dry contacts
6. Parallel port
7. RS232
8. RS485
9. USB
10. EPO
11. Terminal block
12. GND
13. Battery connectors for 30kVA

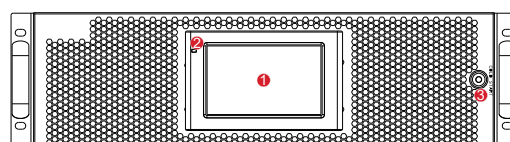


10-60kVA front appearance

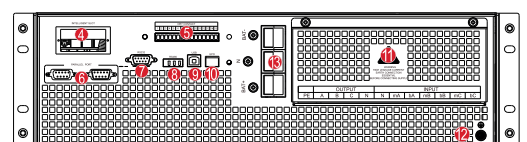

30kVA back appearance

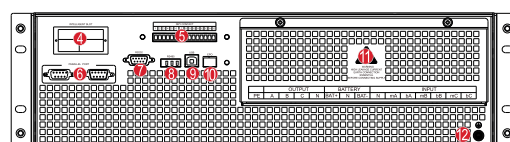

10-20kVA back appearance

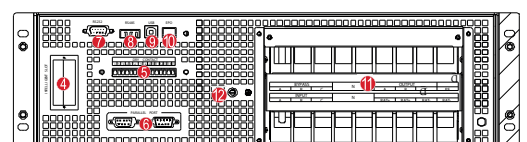

40-60kVA back appearance

MODEL	KUE 3RT10 LB	KUE 3RT20 LB	KUE 3RT30 LB	KUE 3RT40 LB	KUE 3RT60 LB
Capacity	10kVA / 10kW	20kVA / 20kW	30kVA / 30kW	40kVA / 40kW	60kVA / 60kW
INPUT					
Rated voltage	380 / 400 / 415 Vac (3Φ + N + PE)				
Voltage range	304 ~ 478 Vac, full load 228V - 304V, load decrease linearly according to the min phase voltage				
Rated frequency	50 / 60 Hz (auto-sensing)				
Frequency range	40 ~ 70 Hz				
Power factor	> 0.99				
Bypass voltage range	Selectable, default ~ 20% ~ +15% Up limited: +10%, +15%, +20%,+25%; Down limited: -10%, -15%, -20%, -30%, -40%				
Bypass frequency range	Selectable, ±1Hz, ±3Hz, ±5Hz				
Total harmonic distortion (THDi)	< 3% (full linear load)				
Bypass overload	125%: long term operation; 125% - 130%: 10min; 130% -150%:1min; 150% - 400%: 1s; >400%, less than 200ms				
OUTPUT					
Rated voltage	380/ 400/ 415 Vac (3Φ + N + PE)				
Voltage regulation	± 1% (full linear load)				
Frequency	Synchronized with utility in mains mode, 50/60 Hz ± 0.1% Hz in battery mode				
Waveform	Sinusoidal				
Power factor	1				
Total harmonic distortion (THDv)	< 1% (full linear load), < 3% (full non-linear load according to IEC/EN62040-3)				
Crest factor	3:1				
Overload	<110%, 60min; 110% ~ 125%, 10 min; 125% ~ 150%, 1min; > 150%, 200ms				
BATTERIES					
DC voltage	± 240 VDC (selectable, 32-40pcs)				
Charging current	10A max.			15A	20A
Charging voltage precision	1%				
Recharge time	Long time model: depend on the capacity of battery				
SYSTEM					
Efficiency	95% Max.			96% Max.	
Transfer time	0ms				
Protections	Short-circuit, overload, overtemperature,battery low voltage, overvoltage, undervoltage and fan failure				
Max.number of parallel connections	4				
Communications	RS232, USB, RS485, EPO, Dry contacts, Parallel port (Standard) SNMP card, Wi-Fi card, GPRS card, SMS alarms (Optional)				
Display	LED + 5 inches LCD touch screen				
OTHERS					
Operating temperature	0°C ~ 40°C				
Storage temperature	-40°C ~ 70°C (without battery)				
Relative humidity	0 ~ 95% (non-condensing)				
Altitude	<1000 m, load derated 1% per 100m from 1000 ~ 2000m				
IP rating	IP 20				
Noise level at 1 m	< 60 dB			< 65 dB	
Dimensions (W x D x H)(mm)	440 x 660 x 130		440 x 750 x 130	440 x 730 x 130	440 x 800 x 130
Packaged dimensions (W x D x H) (mm)	532 x 800 x 204		532 x 890 x 204	535 x 865 x 226	535 x 930 x 226
Net weight (kg)	22	24	29	33	39
Gross weight (kg)	24	26	31	36	42

- Lb means long time model.
- All specifications are subject to change without notice