

Product Introduction

Range of application

- This series product can be widely used in enclosed area for climate control, such as wireless communication cabinet, battery cabinet, industry control cabinet etc;


Product Design Feature

- Designed with all DC driven components like fans, compressor;
- Precise temperature control through inverter digital regulation of compressor, fans;
- Power supply voltage range: DC44~59 V;
- A comprehensive self-protection design to realize partial load starting, partial load operation at severe ambient condition;
- Low power consumption design with $EER \geq 3.5$, $SEER \geq 5.5$;
- Energy saving reach to 50% comparing with A.C. version product;
- IP55 environment protection & fit for T3 high temperature working condition by using of R134a refrigerant gas;
- The best cooling solution for solar, wind, diesel generator etc, hybrid power system;
- Strict process control and international brand parts deployed to ensure high quality and reliable of this product;
- Multiple self protection design;
- LED Display, all the settings can be changed at the field; Measure and read the value of temperature and humidity
- Dry contact alarm output, NO/NC optional;
- Equipped with communication interface: RS485 and SNMP. Remote On and Off function available

Technical Parameters


Name	Outdoor Cabinet Air Conditioner	
Model	HRUC A 010/N/E/D	HRUC A 010/N/E/D/H05
Mounting Method	Semi-embedded Mounting	
Power Supply	-48VDC	
Cooling Capacity	1000W@L35/L35	
Power Consumption	280W@L35/L35	
Cooling Capacity	440W@L35/L55	
Power Consumption	380W@L35/L55	
Internal Airflow	400 m ³ /h	
Working Temperature Range	-40°C~+55°C	
Max Noise Level	65dB(A)	
IP Grade	IP55	
Net Weight	27Kg	
Refrigerant	R134a	
Dimensions	797x385x165(mm,HxWxD)	
CE&RoHS Compliant	YES	
Surface Treatment	Outdoor type powder coating, standard color: RAL7035	
Heater (Optional)	500W (DC Powered,** /H05)	

Cooling Capacity Chart

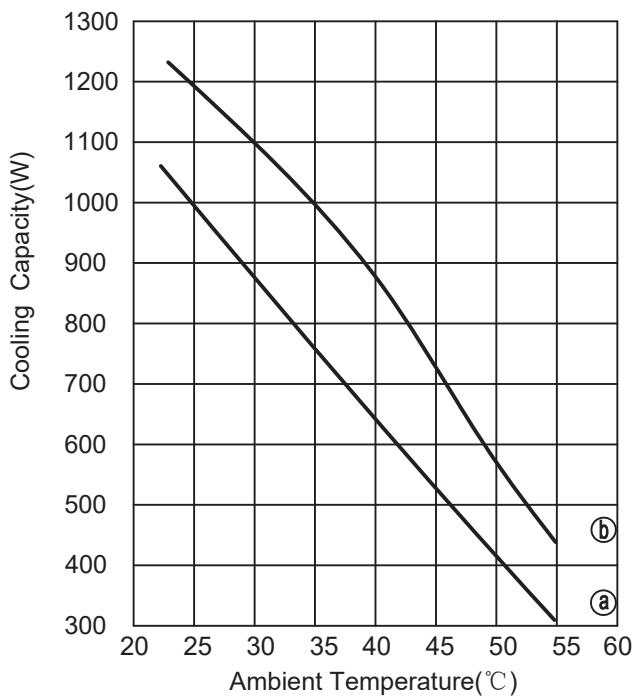

Cabinet Inside Temperature (a)-----25°C
 (b)-----35°C


Power Consumption Chart

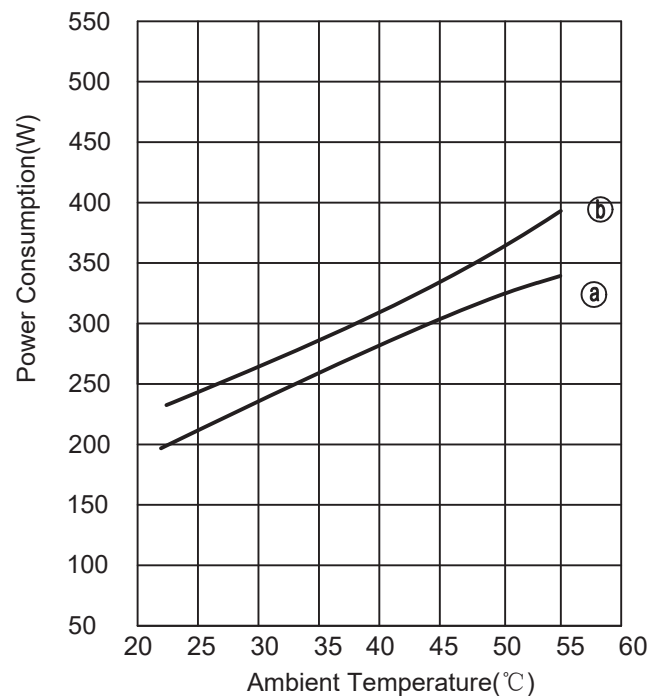

Cabinet Inside Temperature (a)-----25°C
 (b)-----35°C

Product Dimension

Code	Model	Installation
88560	HRUC A 010/N/E/D	Semi-embedded Mounting
	HRUC A 010/N/E/D/H05	

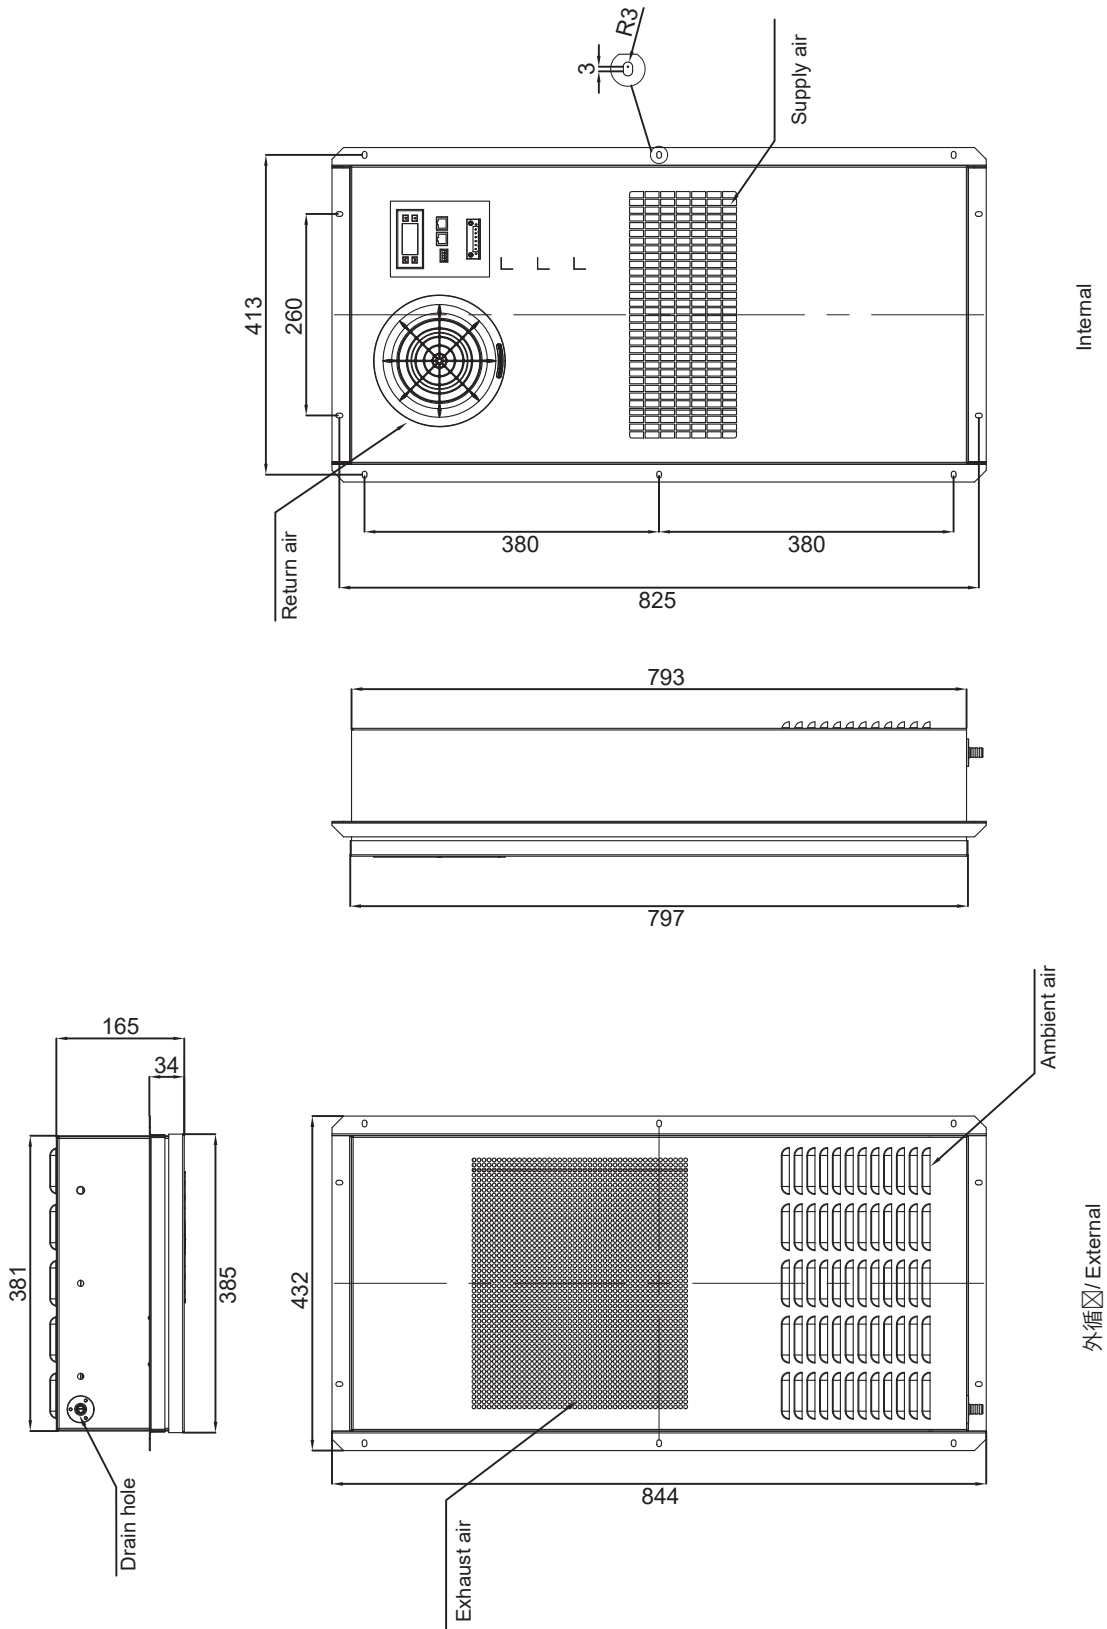

Installation instructions

Code	Model	Installation
88560	HRUC A 010/N/E/D	Semi-embedded Mounting
	HRUC A 010/N/E/D/H05	

Figure 1-Cabinet Door Cutting Dimension

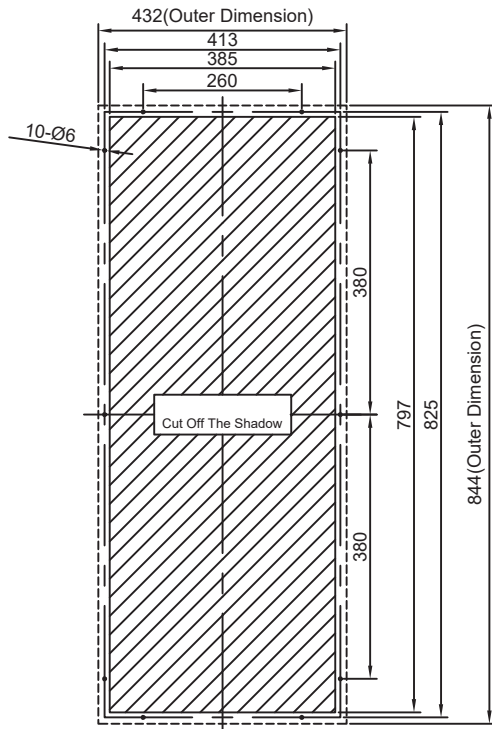


Figure 2-Air open design of cowling


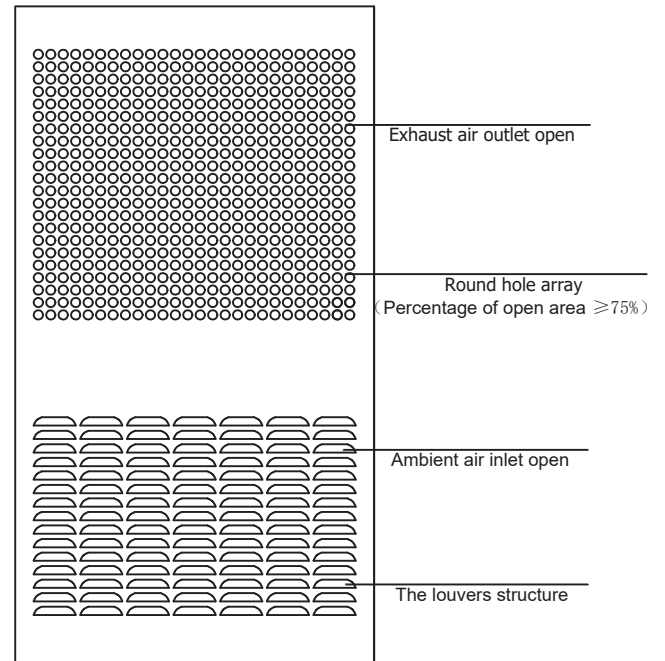


Figure 3-Installation Instruction

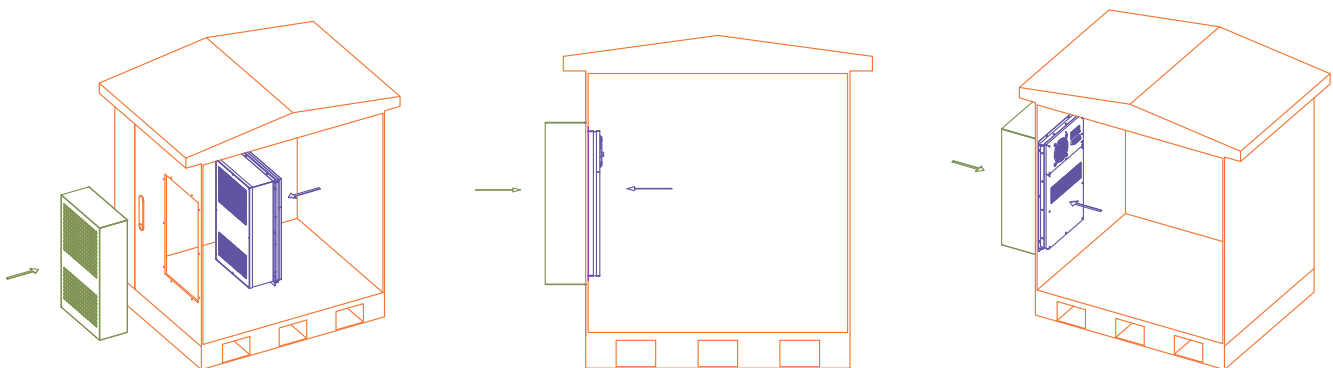

Attention:

This series air conditioner does not need a cowling, if customer does want to put a cowling outside unit, please follow below rules:


1. The cowling can be made by customer self, the design of cowling please refer to figure 2

2. The inlet and outlet open for ambient air in and exhaust air out should be big enough to ensure enough air volume circulation.

This is very important to have the air conditioner running with long lifetime and less service.

3. When you make a cowling design/installation, make sure the inlet air and outlet air not been short cut, this is also critical to keep unit have best cooling performance.



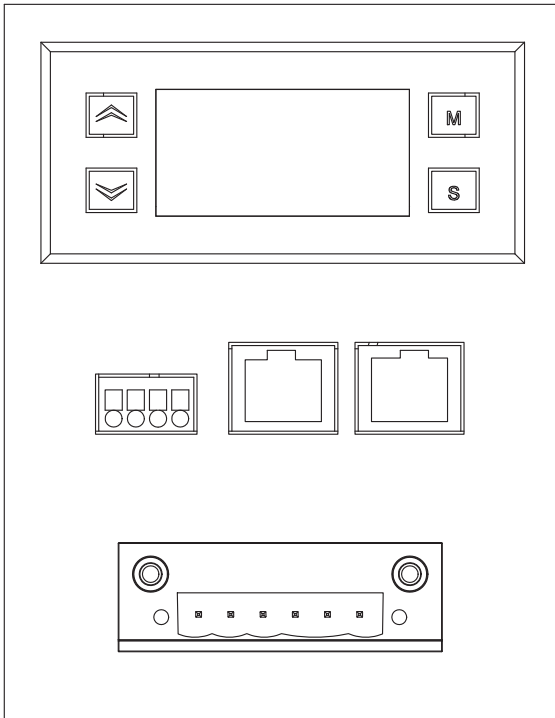

Terminal instructions




Instructions of display panel:

The display panel shows cabinet temperature under normal circumstance. and shows alarm code when there is a malfunction.

In the bottom is the status bar, different lamp represents different status.

-  : Flashing when self diagnosis or temperature setting mode.
-  : Lamp on when cooling;
-  : Lamp on when external fan is running;
-  : Flashing when alarm.

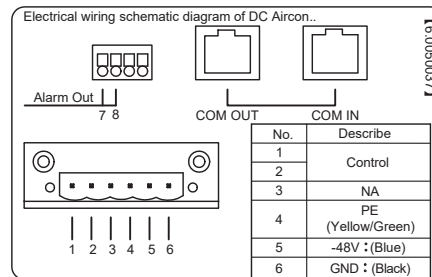

Number	Symble	Definition
1	Control in	The control input port
2		
3	NA	Disable
4	PE	Ground wire of DC power
5	-48V	Negative pole of DC power
6	GND	Positive pole of DC power
7	Alarm out	Port of dry contract alarm output
8		
9	COM OUT(IN)	RS485 communication and SNMP

